
Datasheet

Xitanium isolated Fixed Output (SimpleSet)

Xitanium 75W 0.7-2.0A 54V S 230V G2
9290 038 72606

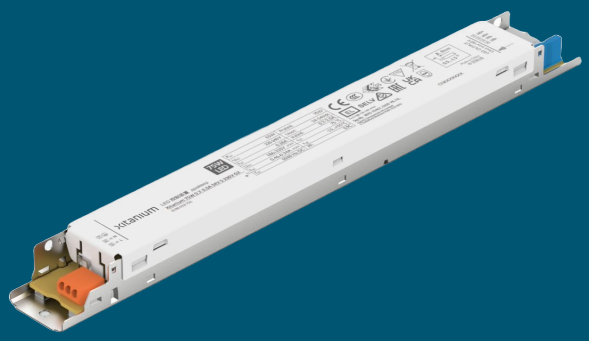

Xitanium isolated Fixed Output drivers are ideal for Low Voltage (LV) linear systems.
They offer ease of design-in and make the approbation process easier. The Xitanium range is built on three pillars: quality of light, reliability and flexibility. By using Xitanium LED drivers in your luminaires, you can be sure to offer your customers high quality of light without visual flicker and stroboscopic effects. The reliability of your complete lighting system is enhanced as our drivers offer specific features that protect the connected LED module, including reduced ripple current and thermal de-rating. Finally, application-oriented operating windows offer the flexibility required to provide the stable lumen output and light quality levels that lighting specifiers and architects demand.

Benefits

- High quality of light
- High reliability
- Future-proof flexibility

Application

- Offices
- Retail: supermarkets, shopping malls

Features

- High efficiency
- Wide operating windows - output current can be adjusted via SimpleSet
- Reduced ripple current for increased reliability
- SELV
- Suitable for Class I and Class II luminaires

Logistical data

Specification item	Value
Product name	Xitanium 75W 0.7-2.0A 54V S 230V G2
EOC	872016938507800
Logistic code 12NC	9290 038 72606
EAN1 (GTIN)	8720169385078
EAN3 (box)	8720169385085
Pieces per box	24
Weight	212 gram

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V_{ac}	Performance range
Rated input voltage	230	V_{ac}	
Rated input frequency	50...60	Hz	Performance range
Rated input current	0.38	A	@ Maximum output power @ rated input voltage
Rated input power	85.0	W	@ Maximum output power @ rated input voltage
Power factor performance range	≥ 0.90 C		@ Maximum output power @ rated input voltage
Total harmonic distortion	20	%	@ Maximum output power @ rated input voltage
Efficiency	89.0	%	@ Maximum output power @ rated input voltage @ max. Uout
Rated input voltage DC	186...250	V_{dc}	Performance range. EOFi=0.95
Rated input current DC	0.34...0.46	A_{dc}	Performance range
Input voltage AC	198...264	V_{ac}	Operational range.
Input frequency AC	45...66	Hz	Operational range
Input voltage DC	168...275	V_{dc}	Operational range
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	24...54	V_{dc}	
Output voltage max.	60	V	Maximum output voltage (rms)
Output current	700...2000	mA	
Output current tolerance ±	5	%	@full load
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 4	%	
Output P_{st}^{LM}	≤ 0.8		
Output SVM	≤ 0.3		
Output power	21.0...75.0	W	

Control interfaces

Specification item	Value	Unit	Condition
Control method	Fixed		AOC configurable via SimpleSet. See design-in guide for more details.

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Input wire strip length	8...9	mm	
Output wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Output wire strip length	8...9	mm	
Maximum cable length	2	m	Total length of wiring including LED module, one way. For longer wiring please double check EMI behavior of luminaire




Isolation

Insulation per IEC61347-1	Input	Output	Housing
Input	-	SELV	Basic
Output	SELV	-	Basic
Housing	Basic	Basic	-

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	280	mm	
Mounting hole distance (A2)	270	mm	
Width (B1)	30	mm	
Height (C1)	21	mm	
Mounting hole diameter (D1)	4.1	mm	
Weight	212	gram	

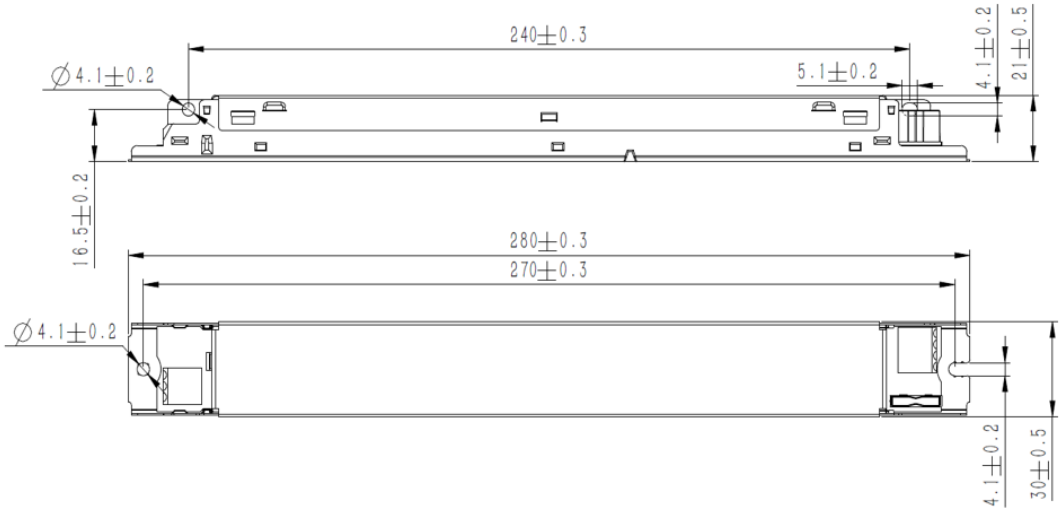


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+50	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-max	75	°C	Maximum temperature measured at T_{case}-point
Tcase-life	65	°C	Measured at T_{case}-point
Maximum housing temperature	110	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	100,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%
Mains switching cycles	> 100,000	switches	See Design-in guide for detailed explanation

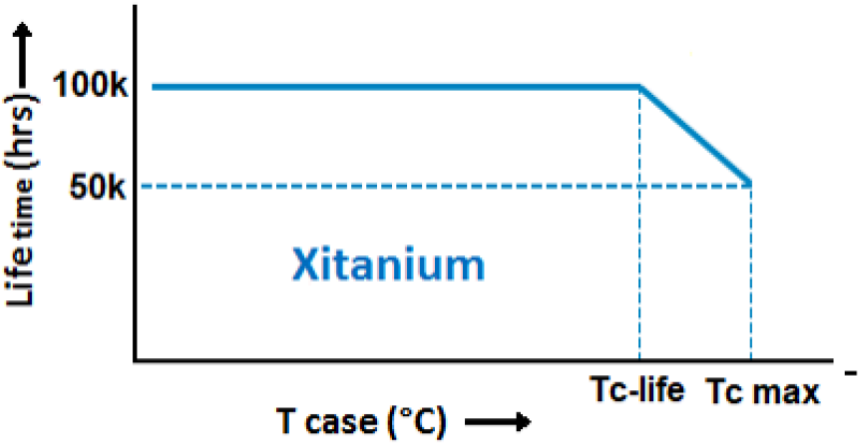

Maximum failures = 10%

Temperature [°C]	Lifetime	Unit	Condition
75	50000	hr	
70	71000	hr	
65	100000	hr	Temperature measured @Tc point
60	>100000	hr	
55	>100000	hr	

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+85	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features


Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	SimpleSet	700 mA	
Adjustable Light Output (ALO)	Yes	OFF	
Adjustable Light Output (ALO) min level	Yes	OFF	
Corridor Mode	No		
DC emergency (DCemDim)	No		
OEM Write Protection (OWP)	Yes	OFF	

Non-programmable features

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	No	
Suitable for fixtures with protection class	I and II	per IEC60598
Box configuration	Yes	
Energy metering (DALI part 252)	No	
Diagnostics via Signify tool	No	

Inrush current

Specification item	Value	Unit	Condition
Inrush current	32.3	A	Input voltage 230V
Inrush peak width	218	µs	Input voltage 230V, measured at 50% height
Drivers / MCB 16A type B @230V AC	≤ 18	pcs	Input voltage 230V

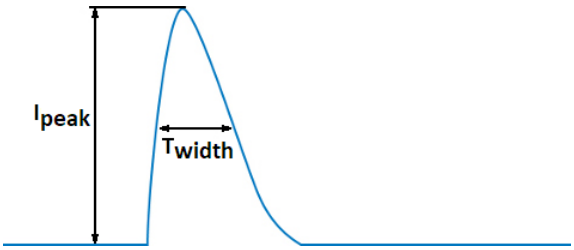

Please refer to the driver design in guide if you use other MCB-types.

If several mini circuit breakers are used directly side-by-side (without distance pieces a correction factor of 80% has to be applied to the rated current

Driver touch current / protective conductor current / earth leakage current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current (ins. Class I)	0.4	mA rms	Acc. IEC60598-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

Application Info (Approbation)

Specification item	Value
Approval marks and Certifications	CCC / CE / EAC / EL / ENEC / RCM / SELV / TISI / UA / UKCA
Ingress Protection classification (IP)	20
Application	Indoor Linear
Mounting Type	Built-in

Graphs


Operating window

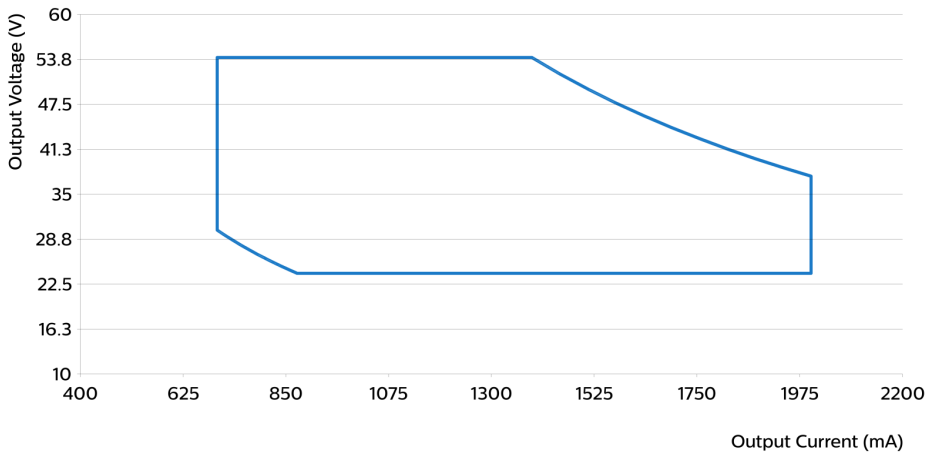


Type	Output current (mA)	Min. output voltage (V)	Max. output voltage (V)	Max. output power (W)
Xitanium 75W 0.7-2.0A 54V S 230V G2	700	30	54	37.8
Xitanium 75W 0.7-2.0A 54V S 230V G2	750	28	54	40.5
Xitanium 75W 0.7-2.0A 54V S 230V G2	800	26	54	43.2
Xitanium 75W 0.7-2.0A 54V S 230V G2	850	24	54	45.9
Xitanium 75W 0.7-2.0A 54V S 230V G2	900	24	54	48.6
Xitanium 75W 0.7-2.0A 54V S 230V G2	950	24	54	51.3
Xitanium 75W 0.7-2.0A 54V S 230V G2	1000	24	54	54
Xitanium 75W 0.7-2.0A 54V S 230V G2	1050	24	54	56.7
Xitanium 75W 0.7-2.0A 54V S 230V G2	1100	24	54	59.4
Xitanium 75W 0.7-2.0A 54V S 230V G2	1150	24	54	62.1
Xitanium 75W 0.7-2.0A 54V S 230V G2	1200	24	54	64.8
Xitanium 75W 0.7-2.0A 54V S 230V G2	1250	24	54	67.5
Xitanium 75W 0.7-2.0A 54V S 230V G2	1300	24	54	70.2
Xitanium 75W 0.7-2.0A 54V S 230V G2	1350	24	54	72.9
Xitanium 75W 0.7-2.0A 54V S 230V G2	1400	24	53	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1450	24	51	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1500	24	50	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1550	24	48	75

Xitanium 75W 0.7-2.0A 54V S 230V G2	1600	24	46	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1650	24	45	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1700	24	44	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1750	24	42	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1800	24	41	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1850	24	40	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1900	24	39	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	1950	24	38	75
Xitanium 75W 0.7-2.0A 54V S 230V G2	2000	24	37	75


Power factor versus output power

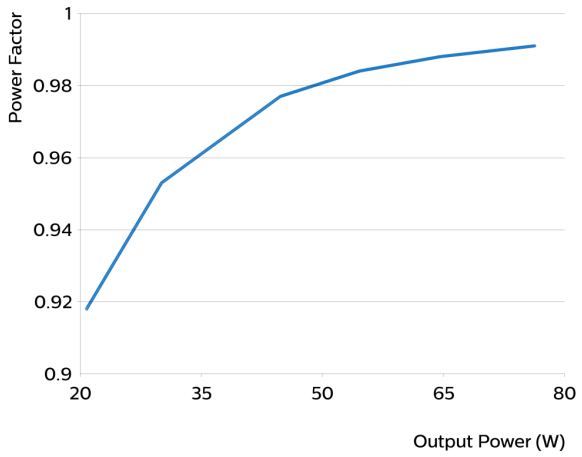

Efficiency versus output power

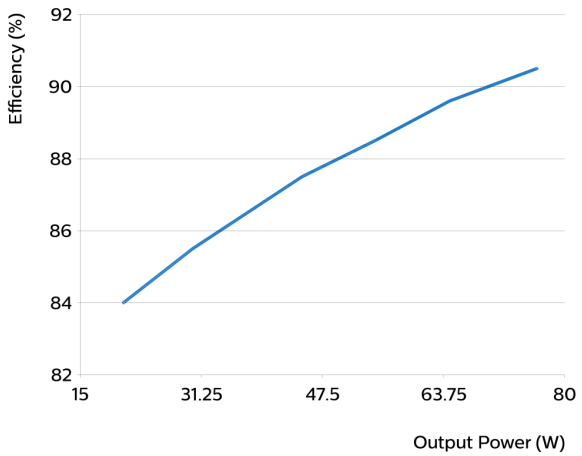

THD versus output power

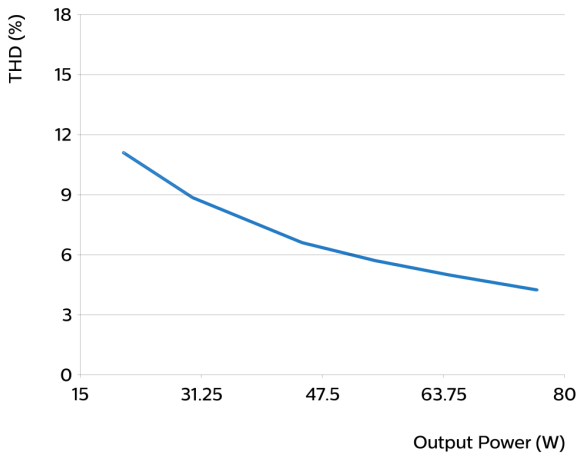

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.