

REV	修订记录		绘图/日期		审核/日期	
A	新发行		2015/01/04			

Material characteristics

Mounting Hardware: Phosphor bronze,
Tin planting

Plastic Parts: PA9T UL94V-0

Technical Parameters

Reference standards: UL1977 VDE








Rated Voltage: 300V 320V/160V

Rated Current: 9A 9A

Wire size: AWG24-18 0.34~0.75mm²

Taping packing

1000PCS/R

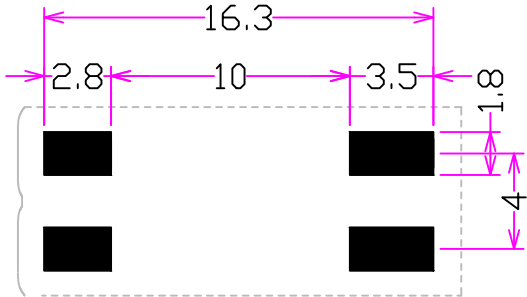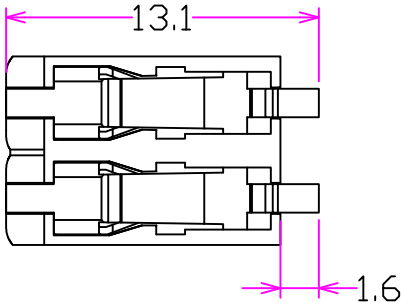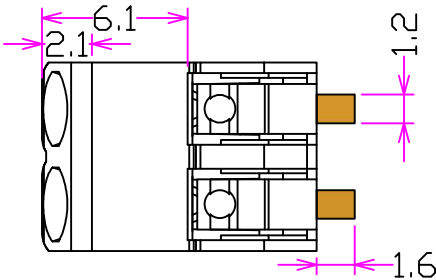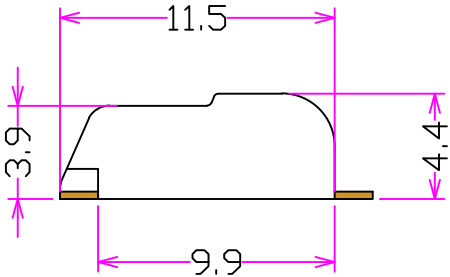

SMD 2P PCB board welding

Without individual tolerance reference					Drawing Categories	Product Diagram	Part No.	*****	Item No.	CM-2060-2P	
0.5~3	3~6	6~30	30~120	>120	Dimension units	m m	Drawing No.	G043-1	Type	SMD Terminal Block	
±0.08	±0.15	±0.20	±0.30	±0.40	Projection Method		Scale	1:1 Page A4			



Fucon