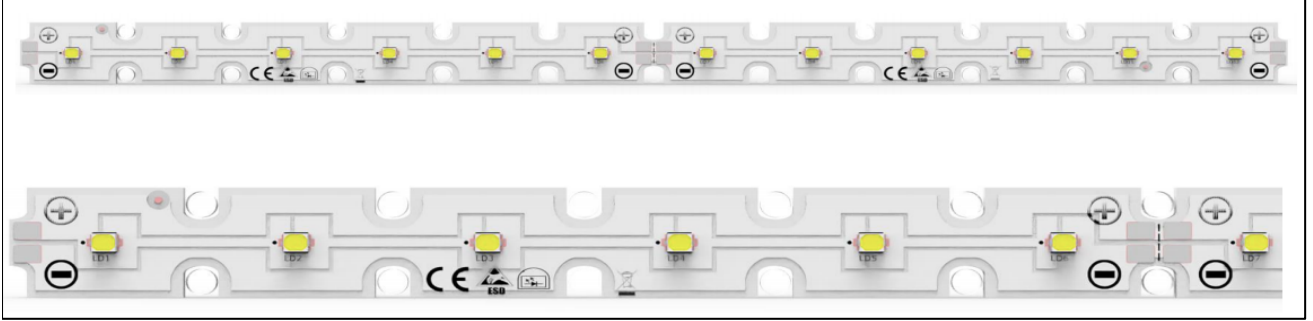


Common Characteristic [@Tj : 85°C] ;			
Module Code	4087N-LN06S02PCC-XX01-L012-C00-160L1A2H35-17X300 -V1	Electrical Connection	
PCB Material	ALU		
Operating Temperature (°C)	-40 ~ +85	Parallel	2
Storage Temperature (°C)	-40 ~ +55	Series	6
Thermal Conductivity (W/m-K)	1>	LED Quantity	12

LED	SAMSUNG LM302Z+		
Correlated Color Temperature (CCT)	4000K		
Color Rendering Index (CRI)	80+		
Module Operating Voltage (V)	35,5	36,2	37,6
Module Operating Current (mA)	200	250	350
Branch Operating Current (mA)	100	125	175
Module Power (W)	7,10	9,05	13,16
Module Light Output (lm)	1157	1411	1886
Module Efficiency (lm/W)	163	156	143

LED	SAMSUNG LM302D		
Correlated Color Temperature (CCT)	4000K		
Color Rendering Index (CRI)	80+		
Module Operating Voltage (V)	35,2	36	37,7
Module Operating Current (mA)	200	250	350
Branch Operating Current (mA)	100	125	175
Module Power (W)	7,04	9,00	13,20
Module Light Output (lm)	1236	1508	2008
Module Efficiency (lm/W)	176	168	152