
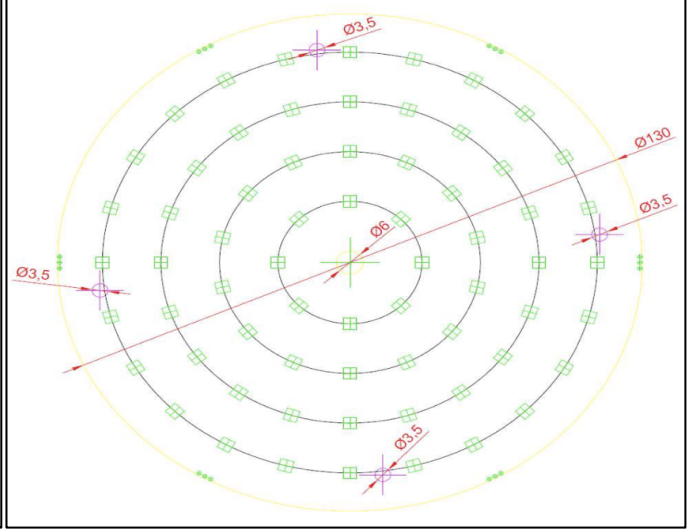


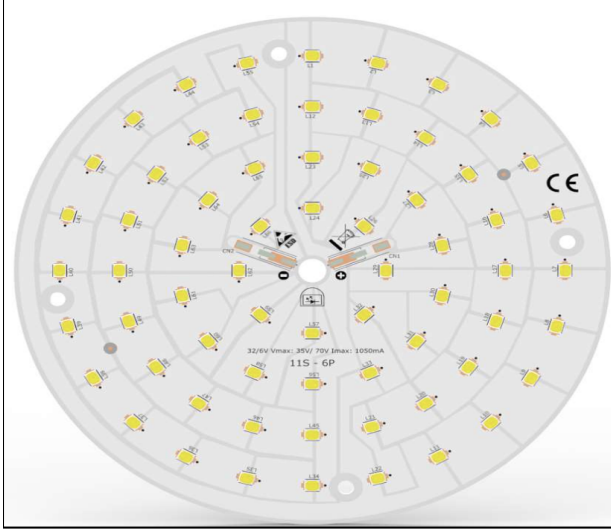

Common Characteristic [@Tj : 85°C] ;

Module Code	4087N-RD11S06P-XX01-L066-C02-100L1A1H35-130X130	Electrical Connection	
PCB Material	ALU		
Operating Temperature (°C)	-40 ~ +85	Parallel	6
Storage Temperature (°C)	-40 ~ +55	Series	11
Thermal Conductivity (W/m-K)	1>	LED Quantity	66

LED	SAMSUNG LM281B+SA		
Correlated Color Temperature (CCT)	4000K		
Color Rendering Index (CRI)	80+		
Module Operating Voltage (V)	31,7	32,2	32,9
Module Operating Current (mA)	350	500	700
Branch Operating Current (mA)	58	83	117
Module Power (W)	11,10	16,10	23,03
Module Light Output (lm)	1974	2740	3720
Module Efficiency (lm/W)	178	170	162

LED	SAMSUNG LM302Z+		
Correlated Color Temperature (CCT)	4000K		
Color Rendering Index (CRI)	80+		
Module Operating Voltage (V)	62,4	64	65,9
Module Operating Current (mA)	350	500	700
Branch Operating Current (mA)	58	83	117
Module Power (W)	21,84	32,00	46,13
Module Light Output (lm)	3855	5376	7319
Module Efficiency (lm/W)	177	168	159